

Switching Power Supply Type SPD 30W DIN rail mounting

CARLO GAVAZZI



- Universal AC input full range
- Installation on DIN rail 7.5 or 15mm
- Short circuit protection
- Overload protection
- Class 2 output
- High efficiency
- LED indicator for DC power ON
- Power Ok output
- CE, TUV approved and cULus Listed

Product Description

The Switching power supplies SPD series are specially designed to be used in all automation application where the installation is on a DIN rail and compact dimensions and performance are a must.

Ordering Key

SP D 12 30 1 B

Model _____
Mounting (D = Din rail) _____
Output voltage _____
Output power _____
Input Type _____
Optional features _____

Input type: 1= single phase

Approvals



Class I, Div 2 UL 1310 UL 60950-1

Optional Features

Description	Code
Spring connectors	B

Output performances

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)
Single Output Models						
SPD05	85~264 VAC	30 WATTS	+ 5 VDC	6000 mA	77%	79%
SPD12	85~264 VAC	30 WATTS	+12 VDC	2500 mA	82%	84%
SPD24	85~264 VAC	30 WATTS	+24 VDC	1250 mA	83%	86%
SPD48	85~264 VAC	30 WATTS	+48 VDC	625 mA	83%	86%

Output Data

Line regulation	± 0.5%	Rated continuous loading	
Load regulation	± 0.5%	5V Model	6A @ 5VDC/5.4A @ 5.5VDC
Minimum load	0	12V Model	2.5A @ 12VDC/2.1A @ 14VDC
Turn on time (full resistive load)		24V Model	1.25A @ 24VDC/1.05A @ 28VDC
Vi nom, Io nom	1000ms	48V Model	0.625A @ 48VDC/0.54A @ 55VDC
Vi nom, Io nom with 3500µF CAP	2000ms	Reverse voltage	
Transient recovery time	2ms	5V Model	7.5VDC
Ripple and noise	50mVpp	12V Model	18VDC
Output voltage accuracy	± 1%	24V Model	35VDC
Temperature coefficient	± 0.03%/°C	48V Model	63VDC
Hold up time Vi= 115VAC	20ms	Capacitor load	3500µF
Vi= 230VAC	30ms	Voltage rise time	
Voltage fall time (Io nom)	150ms max	Vi nom Io nom	150ms
		Vi nom, Io nom with 3500µF CAP	500ms

Input Data

Rated input voltage	100 - 240VAC	Power dissipation (Vi : 230VAC, Io nom)	5V Model 8.5W 12V Model 5.6W 24V Model 5.5W 48V Model 4.9W
Voltage range	AC 85 - 264VAC DC 90 - 375VDC	Frequency range	47 - 63Hz
Rated input current (Vi : 115VAC, Io nom)	Typ. 560mA Max. 800mA	Leakage current	Input-Output 0.25mA Input-FG 3.5mA
Inrush current	Vi= 115VAC 20A Vi= 230VAC 40A		

Controls and Protections

Overload	110 - 140%	Over voltage protection	VDC
Input fuse	T2A/250VAC internal ¹⁾		Min. Max.
Output short circuit	Fold forward	5V Model 6 12V Model 15 24V Model 30 48V Model 60	6.8 16.5 33 66
Power ready output (only SPD 24)	On threshold ≥19.2-19.4VDC Off threshold ≤19.1-19.3VDC	Internal surge voltage protection (IEC 61000-4-5)	Varistor

¹⁾ Fuse not replaceable by user


General Data (@ nominal line, full load, 25°C)

Ambient temperature	-40°C to 71°C	MTBF (Bellcore issue 6 @ 40°C, GB)	5V Model 551000 Hours 12V Model 582000 Hours 24V Model 588000 Hours 48V Model 609000 Hours
Derating (>61°C to +71°C)	2.5%/°C	Case material	Plastic: PC, UL94-V0
Ambient humidity	20 ~ 90%RH	Dimensions LxWxD mm(inch)	90(3.6) x 40.5(1.59) x 114(4.49)
Storage	-40°C to +85°C	Weight	270g
Protection degree	IP20		
Cooling	Free air convection		
Pollution degree	2		


Norms and Standards

Vibration resistance	meet IEC 60068-2-6 (Mounting by rail: 10-500Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)	CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3, EN 61000-4-4 Level 4, EN 61000-4-5 L-Level 3, L/N-FG Level 4, EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11, ENV 50204 Level 2, EN 61204-3
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 faces, 3 times for each face)		
UL / cUL	UL508 listed, UL60950-1, UL1310 Class 2 Power (only 5V, w/o Class 2) Recognized, ISA 12.12.01 (Class 1, Division 2, Groups A, B, C and D)		
TUV	EN 60950-1, CB scheme EN 61558-1, EN 61558-2-17 (meet EN 60204)		
CCC	GB4943, GB9254, GB17625.1		

Rdy connection

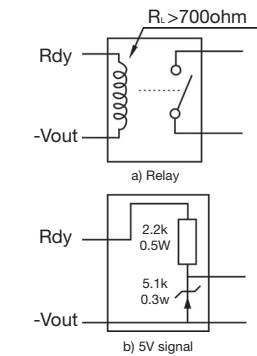


Block Diagrams

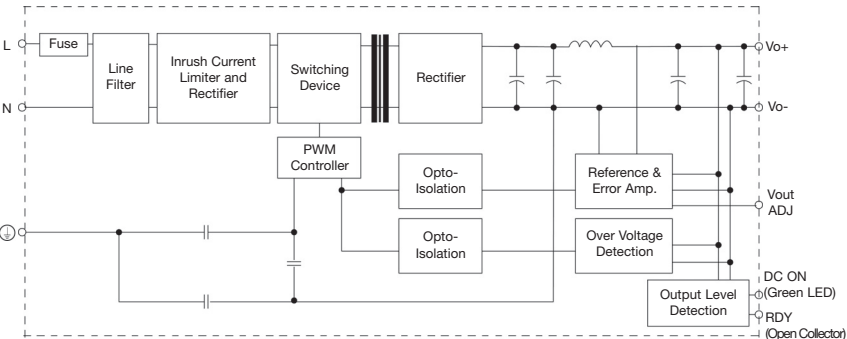


Pin Assignement and Front Controls

Pin No.	Designation	Description
1	RDY	DC OK output for relay (not connect except 24V model)
2	+	Positive output terminal
3	+	Positive output terminal
4	-	Negative output terminal
5	-	Negative output terminal
		Ground this terminal to minimize high-frequency emissions
	N	Input terminals (neutral conductor, no polarity at DC input)
	L	Input terminals (phase conductor, no polarity at DC input)
	Vout ADJ	Trimmer-potentiometer for Vout adjustment
	DC ON	Operation indicator LED


Derating Diagram

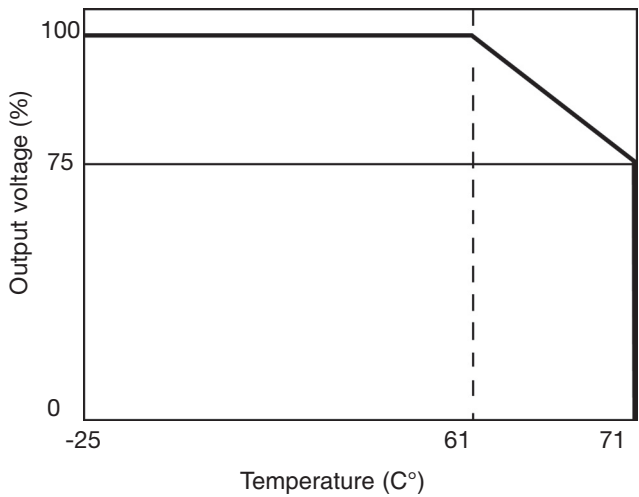


Typ. Efficiency Curve

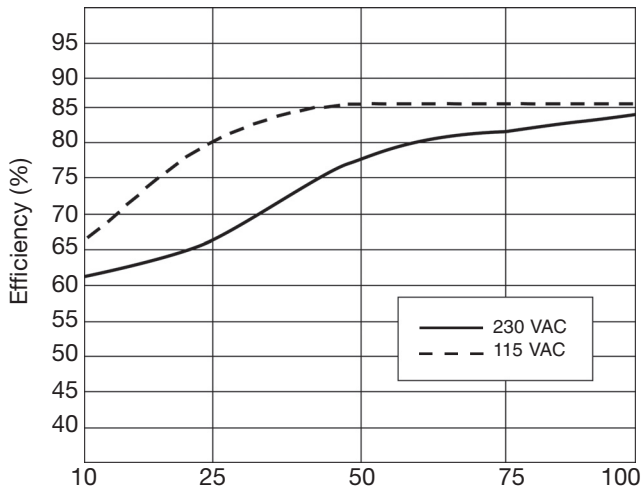

Typ. Current Limited Curve

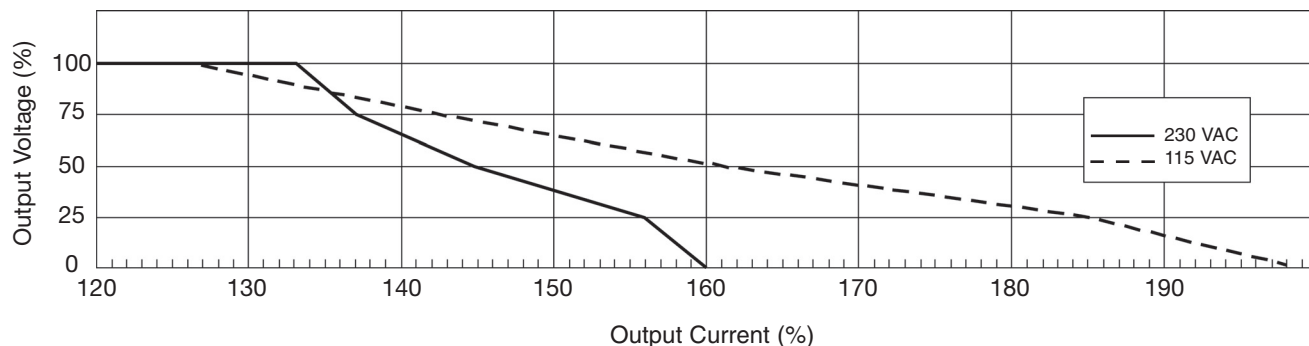

Mechanical Drawings mm (inches)

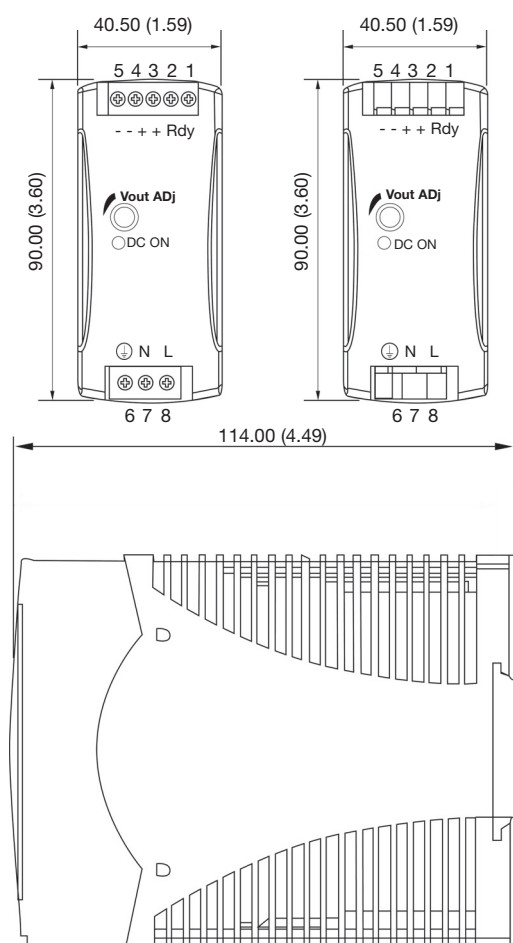

Installation

Ventilation and cooling	Normal convection All sides 25mm free space for cooling is recommended
Connector size range	
Spring terminal	AWG24-14 (0.2~2mm ²) flexible/solid cable, 10mm stripping at cable and recommends use copper conductors only, 60/75°C
Screw terminal	AWG26-12 (0.2~2.5mm ²) flexible/solid cable, connector can withstand torque at max 0,56Nm (5 lbs-in). 4~5 mm stripping at cable and recommends use copper conductors only, 60/75°C
Max. torque for terminal	
Input terminals	0.56Nm (5.0lb-in)
Output terminals	0.56Nm (5.0lb-in)
General tolerances mm(in.)	
0.00 (0.00) ÷ 30.00 (1.18)	±0.30 (0.01)
30.00 (1.18) ÷ 120.00 (4.72)	±0.50 (0.02)

Switching Power Supply
Type SPD 30W
DIN rail mounting



COPYRIGHT ©2026
Carlo Gavazzi Controls S.p.A. Viale De Gasperi 31, 20045 Lainate, Italy
Download the PDF: <https://gavazziautomation.com>