

Switching Power Supply

Type SPD 480W

DIN rail mounting



- Universal AC single phase input full range
- Can also be used as bi-phase 400VAC
- Installation on DIN rail 7.5 or 15mm
- PFC as standard
- High efficiency up to 90%
- Power ready output
- Parallel connection feature
- Compact dimensions
- CE, TÜV, approved and cULus listed
- Class I Div 2 Groups A, B, C, D approved

Product Description

The Switching power application where the supplies SPD series are specially designed to be used in all automation and performance are a must.

Ordering Key

SP D 24 480 1 B

Model _____
 Mounting (D = Din rail) _____
 Output voltage _____
 Output power _____
 Input type _____
 Optional features _____

Input type: 1= single phase

Approvals



Optional Features

Description	Code
Plug-in connectors	B

Output Performances

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)
Single Output Models						
SPD24	90~264 VAC	480 WATTS	+ 24 VDC	20 A	86%	89%
SPD48	90~264 VAC	480 WATTS	+ 48 VDC	10 A	87%	90%

¹⁾ When S/P switch is set to parallel, it is not possible to trim output voltage.

Output Data

Line regulation	± 0.5%	Hold up time	
Load regulation		Vi= 115VAC	25ms
Non parallel model	±1%	Vi=230VAC	30ms
Parallel model	±5%	Voltage fall time (I _o nom Vi nom)	150ms max
Minimum load	0A	Rated continuous loading	
Turn on time (full resistive load)		24V Model	20A @ 24VDC/16.8A @ 28.5VDC
Vi nom, Io nom	1000ms	48V Model	2.1A @ 48VDC/8.5A @ 56VDC
Vi nom, Io nom with 7000 µF CAP	1500ms	Reverse voltage	
Transient recovery time	2ms	24V Model	VDC 35
Ripple and noise	100mVpp	48V Model	VDC 63
Output voltage accuracy	±1%	Capacitor load	7000µF
Temperature coefficient	±0.03%/°C	Voltage rise time	
		Vi nom Io nom	150ms
		Vi nom, Io nom with 7000µF CAP	500ms

Input Data

Rated input voltage	115 - 230VAC		Power dissipation		
Voltage range			(Vi : 400VAC, Io nom)	24V Model	63W
AC		90 - 264VAC		48V Model	56W
DC		120 - 375VDC	Frequency range		47-63Hz
Rated input current			Leakage current		
(Vi:90VAC, Io nom)	Typ.	4.9/2.5A	Input-Output		0.25mA
	Max.	7/3.5A	Input-FG		3.5mA
Inrush current			P.F.C Vi=115/230VAC, Ionom		0.99/0.97
	Vi= 115VAC	25A			
	Vi= 230VAC	50A			

Controls and Protections

Overload	110 - 140%	Over voltage protection	125/140%
Input fuse	T10A/250VAC internal	Internal surge voltage protection	Varistor
Output short circuit	Fold forward	(IEC 61000-4-5)	
Power ready output threshold at start up	≥17.6-19.4VDC		
Electrical isolation	500VDC		
Contact rating at 60VDC	0.3A		


General Data (@ nominal line, full load, 25°C)

Ambient temperature	-40°C to +71°C	Case material	Metal
Derating (>61°C to +71°C)	2.5%/C	Dimensions LxWxD mm (inch)	
Ambient humidity	20 ~ 95%RH	Screw terminal type	124.5 x 175.5 x 123.6 mm (4.9 x 6.91 x 4.87 inches)
Storage	-40°C to +85°C	Detachable connector type	143.5 x 175.5 x 123.6 mm (5.65 x 6.91 x 4.87 inches)
Protection degree	IP20	Weight	430 g
Cooling	Free air convection		
Pollution degree	2		
MTB (Bellcore issue 6 @ 40°C, GB)			
24V Model	403000 Hours		
48V Model	416000 Hours		

Norms and Standards

Vibration resistance	meet IEC 60068-2-6 (Mounting by rail: 10-500Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)	CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3, EN 61000-4-4 Level 4, EN 61000-4-5 L-Level 3, L/N-FG Level 4, EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11, ENV 50204 Level 2, EN 61204-3
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 faces, 3 times for each face)		
UL/cUL	UL508 listed, UL60950-1 Recognized		
TUV	EN 60950-1, CB scheme EN 61558-1, EN 61558-2- 17 (meet EN 60204)		
ISA	12.12.01 Class I Div 2 Groups A, B, C, D		
CCC	Available upon request		


Block Diagram

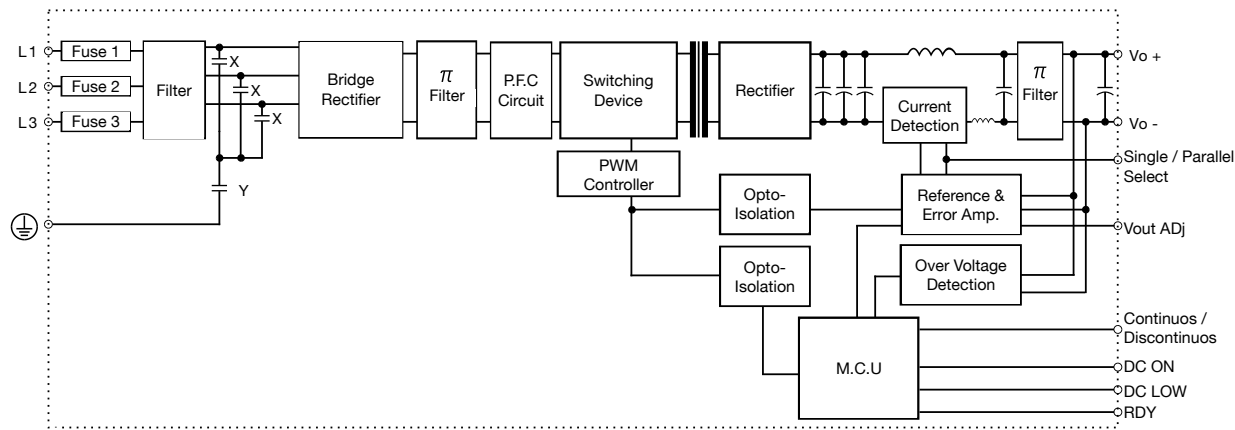


Pin Assignement and Front Controls

Pin No.	Designation	Description
1, 2	V-	Negative output teminal
3, 4	V+	Positive output terminal
5	RDY	A normal open relay contact for DC ON level control
6		(Never connect except 24V model)
7	L	Input terminals (phase conductor, no polarity at DC input)
8	N	Input terminal (neutral conductor, no polarity at DC input)
9		Ground this terminal to minimize high-frequency emissions
	DC ON	Operation indicator LED
	DC LOW	DC LOW voltage indicator LED
	Vout ADJ	Trimmer-potentiometer for Vout adjustment
	S/P	Single / Paralle select switch


Derating Diagram

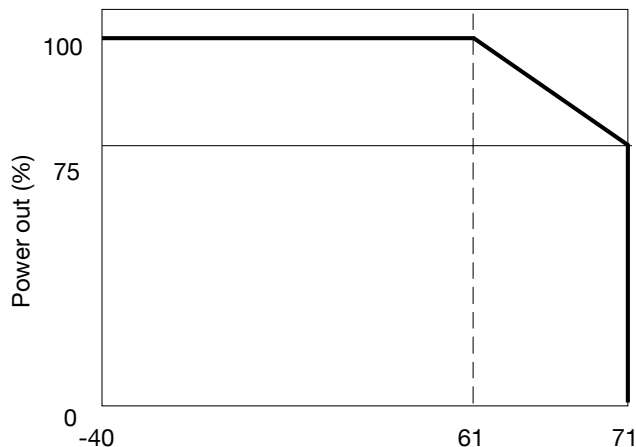


Typ. Efficiency Curve

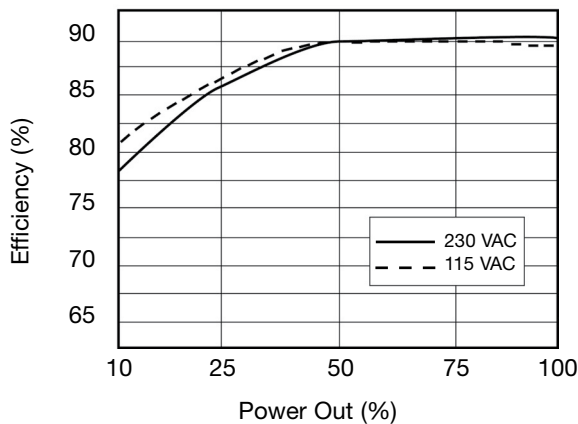

Typ. Current Limited Curve

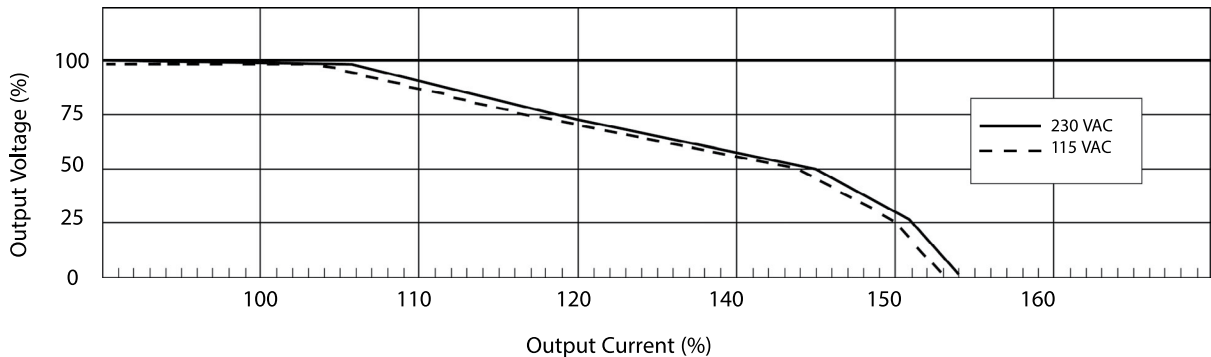

Mechanical Drawings mm (inches)

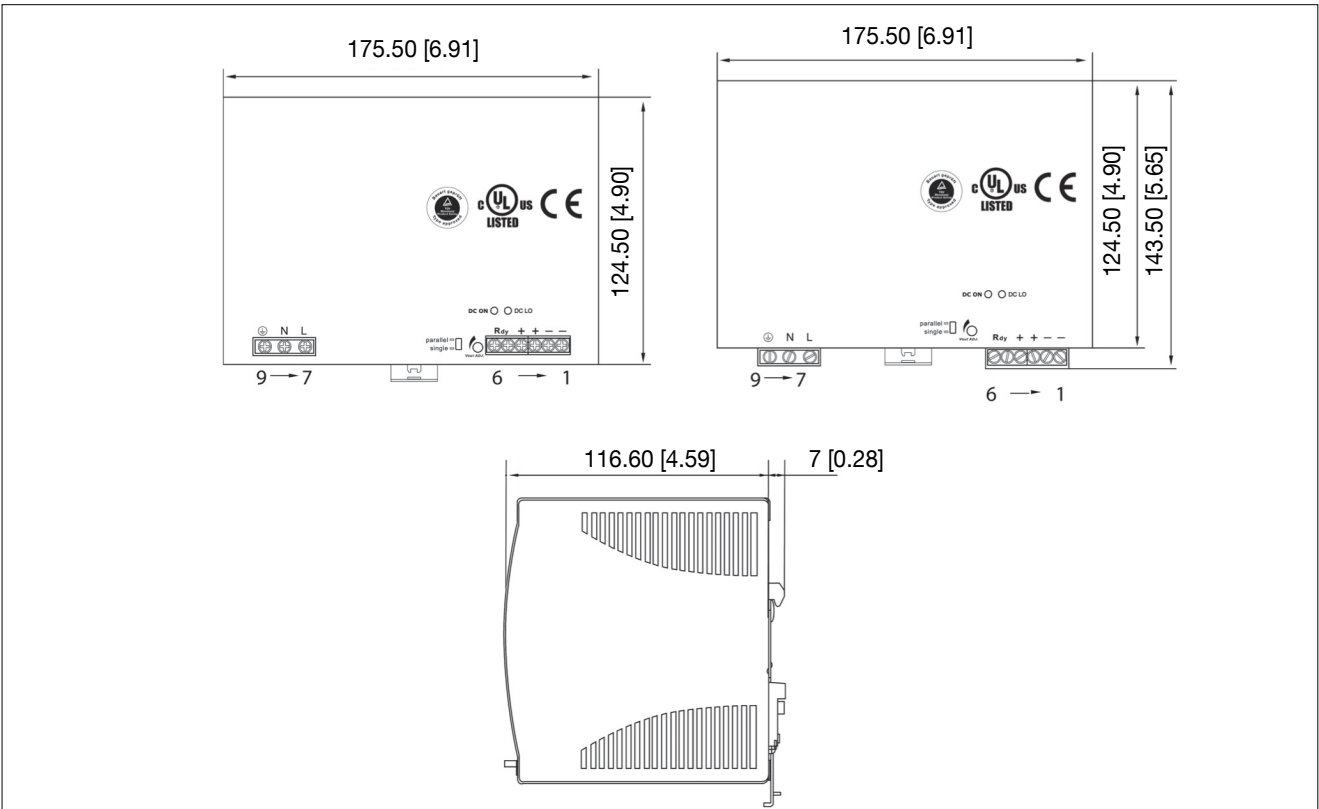

Installation

Ventilation and cooling	Normal convection All sides 25mm free space for cooling is recommended.	Output Connector	can withstand torque at maximum 5.5 poundinches. 8 mm strip ping at cable end recom mends, use copper conductors only, 60/75°C.
Connector	Size range AWG 24-10 (0.2~4mm²) flexible/solid cable.	Max. torque for screws terminals	
Input Connector	can withstand torque at maximum 9 pound-inches	Input terminals	0.784Nm (7.0lb-in)
		Output terminals	0.784Nm (7.0lb-in)

Switching Power Supply
Type SPD 480W
DIN rail mounting



COPYRIGHT ©2026
Content subject to change
Carlo Gavazzi Controls S.p.A. Viale De Gasperi 31, 20045 Lainate, Italy
Download the PDF: <https://gavazziautomation.com>